


# CP-102E/EL

## 2-port RS-232 PCI Express boards

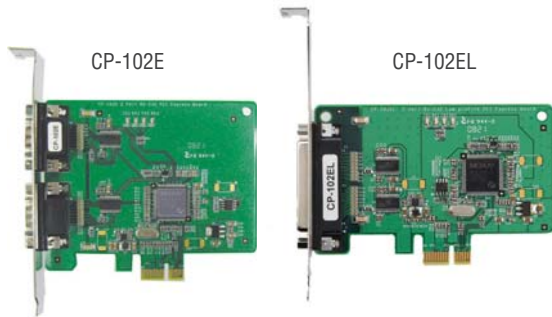

PCComm Lite

- > PCI Express x1 compliant
- > 921.6 Kbps maximum baudrate for super fast data transmission
- > 128-byte FIFO and on-chip H/W, S/W flow control
- > Low profile form factor fits small-sized PCs
- > Drivers provided for a broad selection of operating systems, including the latest Windows and Linux
- > 15 KV ESD protection on the board



### Overview

The CP-102E and low profile CP-102EL are 2-port PCI Express boards designed for POS and ATM applications. Moxa's PCI Express boards are a top choice of industrial automation engineers and system integrators, particularly since the boards support many different

operating systems, including Windows and Linux. The CP-102E/EL's 2 RS-232 serial ports support a super fast 921.6 Kbps baudrate, and provide full modem control signals to ensure compatibility with a wide range of serial peripherals. In addition, the boards' x1 classification allows them to be installed in any PCI Express slot.

### Smaller Form Factor

The CP-102EL is a low profile board that is compatible with any PCI Express slot. The CP-102EL board only requires a 3.3 VDC power

supply, which means that the board fits any host computer, ranging from shoebox to standard-sized PCs.

### Drivers Provided for Windows, Linux

Moxa continues to support a wide variety of operating systems, and the CP-102E/EL boards are no exception. Reliable Windows COM and Linux TTY drivers are provided for all Moxa boards, and other

operating systems, such as WEPOS, are also supported for embedded integration applications.

### Specifications

#### Hardware

**Comm. Controller:** 16C550C compatible

**Bus:** PCI Express x1

#### Connectors:

CP-102E: DB9 male

CP-102EL: DB25 female

#### Serial Interface

**Number of Ports:** 2

**Serial Standards:** RS-232

**Max. No. of Boards per PC:** 4

#### Serial Line Protection

**ESD Protection:** 15 KV on the board

#### Performance

**Baudrate:** 50 bps to 921.6 Kbps

#### Serial Communication Parameters

**Data Bits:** 5, 6, 7, 8

**Stop Bits:** 1, 1.5, 2

**Parity:** None, Even, Odd, Space, Mark

**Flow Control:** RTS/CTS, XON/XOFF

#### Serial Signals

**RS-232:** TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

#### Driver Support

**Operating Systems:** Windows (2012 x64, 8/7/XP/2003/Vista/2008 x86/x64, 2000, 9X/ME/NT), DOS, Linux 2.4.x, Linux 2.6.x, QNX 6, SCO OpenServer 5/6, UnixWare 7, Solaris 10 x86/x64

*Note: Please refer to Moxa's website for the latest driver support information.*

#### Physical Characteristics

##### Dimensions:

CP-102E: 85.04 x 100 mm (3.40 x 4.00 in)

CP-102EL: 67.21 x 101.97 mm (2.69 x 4.08 in)

#### Environmental Limits

**Operating Temperature:** 0 to 55°C (32 to 131°F)

**Storage Temperature:** -20 to 85°C (-4 to 185°F)

**Ambient Relative Humidity:** 5 to 95% (non-condensing)

#### Standards and Certifications

**EMC:** CE, FCC

**EMI:** EN 55022, EN 61000-3-2, EN 61000-3-3, FCC Part 15 Subpart B Class B

**EMS:** EN 55024, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11 (DIPS)  
**Green Product:** RoHS, CRoHS, WEEE  
**MTBF** (mean time between failures)  
**Time:** 3,901,175 hrs  
**Database:** Telcordia (Bellcore), GB

**Power Requirements**

**Power Consumption:**  
 CP-102E: 520 mA @ 3.3 V  
 CP-102EL: 552 mA @ 3.3 V


**Warranty**

**Warranty Period:** 5 years  
**Details:** See [www.moxa.com/warranty](http://www.moxa.com/warranty)


**Dimensions**

Unit: mm (inch)

**CP-102E**

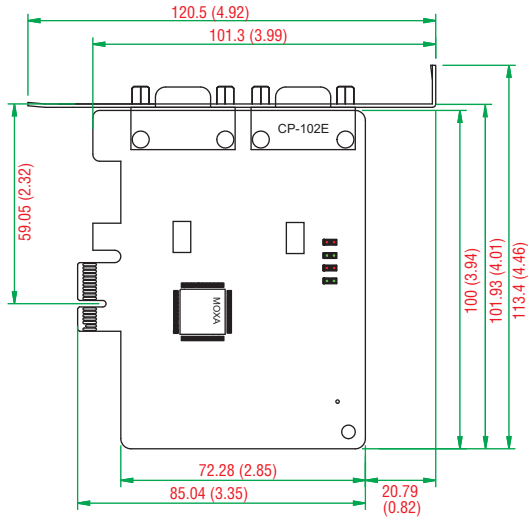

**CP-102EL**

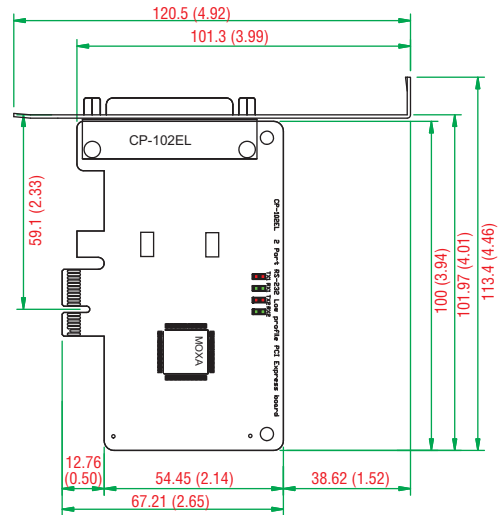

**Ordering Information**

**Available Models**

**CP-102E:** 2-port RS-232 PCI Express x1 serial board  
**CP-102EL-DB9M:** 2-port RS-232 low profile PCI Express serial board (includes DB9 male cable)

**Package Checklist**

- 1 CP-102E or CP-102EL board
- Low profile bracket (CP-102EL only)
- Documentation and software CD
- Quick installation guide (printed)
- Warranty card

**Connection Options** (CP-102EL only, can be purchased separately)

**CBL-M25M9x2-50**

DB25 male to DB9 male x 2 (50 cm cable)



PIN	RS-232
1	DCD
2	RxD
3	TxD
4	DTR
5	GND
6	DSR
7	RTS
8	CTS

**DB9 male**

